

AISI 316L Decolletage

≈1.4404 improved/AISI 316L – Austenitic stainless steel, 316L improved

Features and Particularities

This austenitic stainless steel type 1.4404/"AISI 316L improved" has an addition of Cu to improve its machinability as well as its corrosion resistance. Its low C content lowers the threshold temperature of its sensitization to temperature lower than 650°C. Thence ensuring its good intercrystalline corrosion resistance, polishing ability and weld ability. It has a good corrosion resistance in non-oxidizing acid medium and solutions non-containing halogen elements. This steel can continuously be used up to 430°C. Its machinability is satisfactory, although superior in the cold worked condition. This CHRONIFER 316l Decolletage steel cannot be thermally hardened, but it can be strengthened by cold work. It may contain traces of ferromagnetic δ (Delta) Ferrite that may limit its fine polishing capability. Its adequacy for forming is similar to this of the 1.4435 grade, CHRONIFER® Special 35 austenitic stainless steel.

Uses

This steel has a very broad field of applications. Such as the chemical, pharmaceutical, food petro- and petrochemical industries, paper pulp as well as paper industries and the colorant and textile industries; in the treatment of fresh water, its processing, transport, use and recycling; micromechanical engineering watch making industries.

Standards

Material number	≈ 1.4404
EN 10083-3	≈ X2CrNiMo 17-12-2
DIN /AFNOR	≈ X2CrNiMo 17-12-2
AISI/SAE	≈ 316L
ASTM	(F 899)
AMS	5648
	5653
JIS	SUS 316 L

Chemical composition (%wt.)

C	Si	Mn	P	S	Cr	Ni	Mo	Cu	N	Fe
max.	max.	max.	max.	max.	16.0	10.0	2.00	max.	max.	balance
0.030	1.00	2.00	0.045	0.03	18.0	14.0	3.00	1.00	0.10	

Dimensions and Tolerances

Standard: Bars 3 m (+50/0 mm)
 Mechanical properties: UTS: 600-980 MPa, according to diameter
 • Bars $\varnothing < 10-40$ mm: ISO h8
 Other dimensions and tolerances on request

Executions and Delivery conditions

Standard: Bars 3 m (+50/0 mm)
 • Bars $\varnothing \geq 10-40$ mm: cold drawn, ground, polished, Ra max 0.8 μ m
 Bar ends: pointed and chamfered
 Other executions on request

Hardening Strengthening


- This steel cannot be thermally hardened.
- This steel can be strengthened by cold work

Availability

Standard dimensions on stock, see: [Sale program](#)

Cutting conditions

Machinability: satisfactory, better in the cold worked condition
 Cutting speed: $V_c \approx > 40 - 100$ m/min,
 Lubricant-coolant fluid: individual choice
 • The optimal cutting conditions depend on the machine tool, the cutting tools, the chip dimensions, the lubricant-cooling fluid, as well as the tolerances and surface the roughness to be achieved.

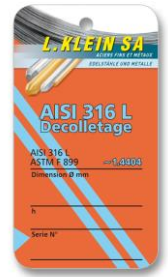

AISI 316L Decolletage

≈1.4404 improved/AISI 316L – Austenitic stainless steel, 316L improved

Figure 1
Strengthening
Cold working curves



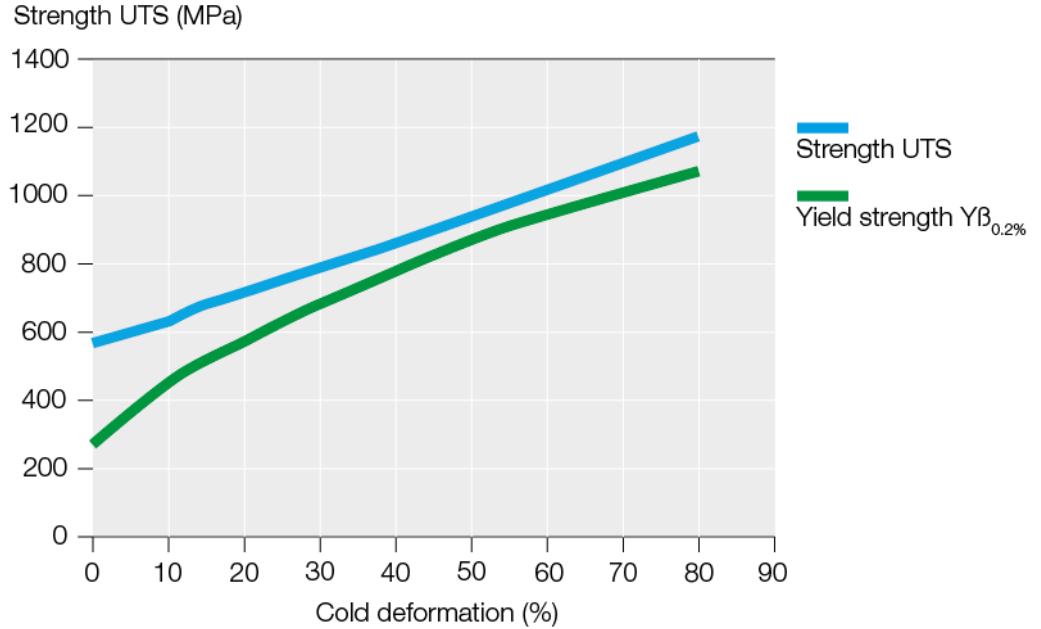


Figure 2
Sensitization
TTS curves

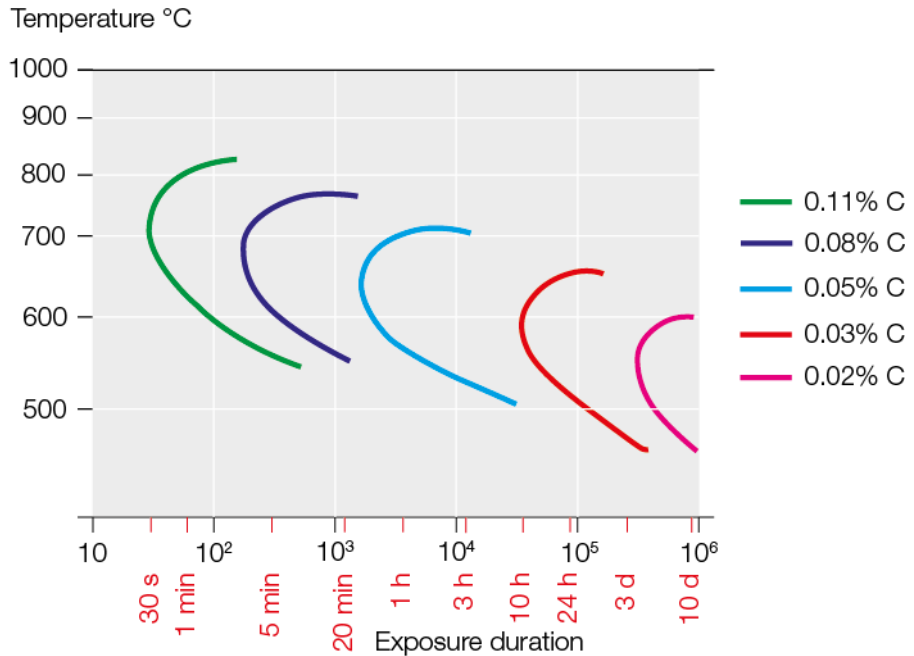

Limitations

Figure 2 shows that this steel can be sensitized by exposures longer than 10h in the temperature range of 450 to 650°C. This sensitization leads to the precipitation of detrimental intergranular carbides at the grains boundaries causing brittleness and intergranular corrosion.

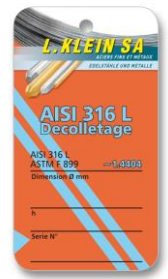

AISI 316L Decolletage

≈1.4404 improved/AISI 316L – Austenitic stainless steel, 316L improved

Laser marking

- The HAZ Zone (Heat Affected Zone) of a normal laser marking should not significantly influence its local microstructure. [More info](#)

Surface oxidation

A thermal oxidation forms colored oxides or scaling on the surface. These must be eliminated, is it chemically by pickling or by mechanical means like grinding.

- Colored surface oxidation and/or scaling can massively reduce the corrosion resistance.

Pickling - Passivation

The pickling and passivation processes and the products used therefore, should always be adapted to the requirements of the pickling and passivation of austenitic stainless steels.

[More info.](#)

Corrosion resistance

- Optimal surface condition: Very clean surface, polished and passivized. [More info.](#)
- The indicative corrosion resistance of the “AISI 316L Decolletage“ steel in various typical medium prevailing in the use of watch exterior components are given in the following table.

Type of corrosion	Condition	Corrosion resistance
Pitting corrosion	all	Small at middle to long-term
Salt spray	all	Medium at long term
Seawater	all	Medium at long term
Stress corrosion cracking	Annealed	Small
	Cold worked	Small at middle term

Galvanic corrosion

This stainless steel is less noble than the CHRONIFER® Special 35 and Special 35 P Grades. Therefore, in particular assembly configuration with these steels in contact with an electrolytic medium, such as watch exterior assemblies, this “AISI 316L Decolletage” steel grade could be subjected to galvanic corrosion.

Elementary precautions

- The most elementary protection is to always keep the surfaces very clean, polished and passivized.
- The parts should always be very well cleaned (no usage residual) and dried.
- Only use adapted chlorine free disinfection, cleaning and washing products.

Magnetism


Ferromagnetism due to the presence of δ (Delta) Ferrite:

- This steel can contain small traces of δ (Delta) Ferrite and exhibit in the annealed condition values of its magnetic relative permeability $\mu > 1.003$.

Ferromagnetism due to the presence of α (Alpha) Martensite:

- This steel can form α (Alpha) ferromagnetic martensite after heavy cold working. This ferromagnetism can exhibit relatively strong relative permeability values $\mu > 1.005$

[More info.](#)

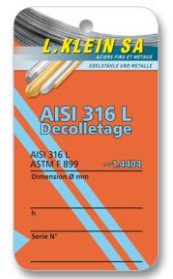

AISI 316L Decolletage

≈1.4404 improved/AISI 316L – Austenitic stainless steel, 316L improved

Physical properties

Properties	Unit	Temperature (°C)				
		20	200	300	400	500
Density	g cm ⁻³	7.98				
Modulus of elasticity E	GPa	200	186	179	172	165
Shear modulus G*	GPa	117				
Poisson coefficient V		0.27-0.28				
Electrical resistance	Ω.mm ² .m ⁻¹	0.75				
Thermal expansion	m m ⁻¹ K ⁻¹	20-100°C	20-200°C	20-300°C	20-400°C	20-500°C
	10 ⁻⁶	16	16.5	17	17.5	18
Thermal conductivity	W.m ⁻¹ .K ⁻¹	15			15.2	
Specific heat	J.kg ⁻¹ .K ⁻¹	500				
Range of melting	°C	1375-1400				
Magnetism		Annealed condition: traces of δ (Delta) Ferrite Relative Permeability: ≥ 1.003				
Magnetism		Heavy cold deformed condition: traces of α (Alpha) Martensite Relative Permeability:> 1.005				

Disclaimer: The information and data of this informative "Data sheet" are indicative only. They are not use instructions. The users must define and endorse them in each case.